


### CELL CHARACTERISTICS

Capacity	Typical	2800 mAh
		10.4 Wh
	Minimum	2700 mAh
		10.0 Wh
Voltage	Nominal	3.7 V
	Charge	4.2 V
	Discharge	3.0 V
Charge Current	Standard	1.4 A
	Maximum	2.8 A
Charge Time	Standard	3 hrs
Discharge Current	Maximum	5.6 A
Temperature	Charge	0°C to 45°C
	Discharge	-40°C to 60°C
Energy Density	Volumetric	609 Wh/l
	Gravimetric	217 Wh/kg

### PHYSICAL CHARACTERISTICS

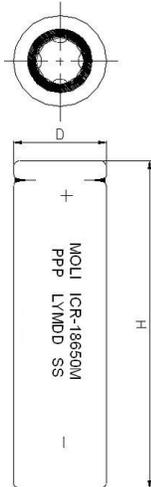

Shape	Cylindrical
Can	Steel
Diameter	18.6 mm (Max)
Height	65.2 mm (Max)
Weight	48 g (Typical)

The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice.

For application specific information, please contact E-One Moli Energy Sales and Applications or the nearest MOLICEL® recognized agent.

Version 1.0


**Taiwan Facility**  
 10 Dali 2nd Rd., Shan-Hwa,  
 Tainan County, Taiwan, R.O.C.  
 Tel: 886-6-505-0666  
 Fax: 886-6-505-0777  
<mailto:molice@molice.com>  
<http://www.molice.com>

**Canada Facility**  
 20 000 Stewart Crescent  
 Maple Ridge, BC, Canada, V2X 9E7  
 Tel: 1-604-466-6654  
 Fax: 1-604-466-6600  
<mailto:molice@molice.com>  
<http://www.molice.com>


**Headquarters**  
 10F, 113, Sec.2, Zhung Shan N Rd.,  
 Taipei, Taiwan, R.O.C.  
 Tel: 886-2-2567-3500  
 Fax: 886-2-2567-6500

Agency:


### Charge Characteristics

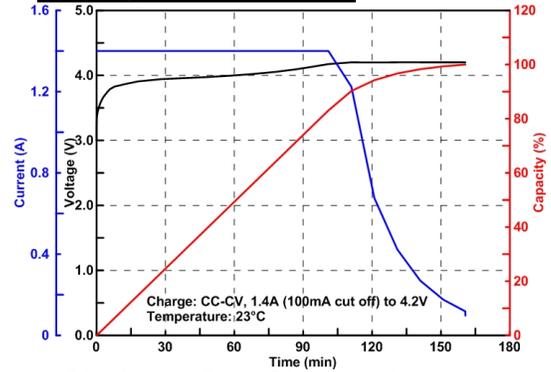

### Discharge Rate Characteristics

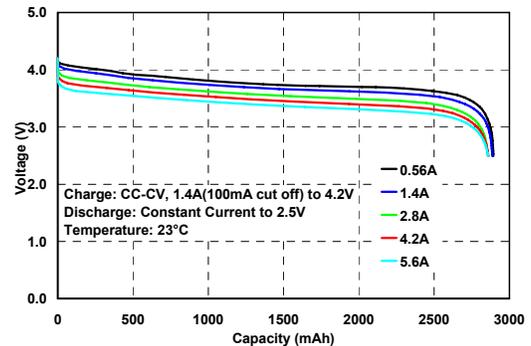

### Discharge Temperature Characteristics

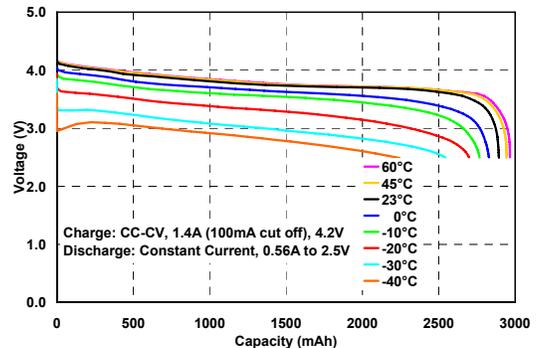

### Cycle Characteristics

