3.7V DNK383562 850mAh LiPo Battery Pack with PCM. This datasheet describes the properties which is manufactured by DNK POWER Co. Ltd.- China.

Electrical Data

Part Number LP 383562 Nominal Voltage 3.7V

Nominal Capacity 850 mAh

Internal Impedance \leq 60m Ω Charge Voltage 4.2V

Recommended Charge Current 0.2C

> 0.5C 4.2 - 2.5V

Recommend Discharge Current 0.2C

1C

Max Continuous Discharge Current Pulse Discharge Current

3C(10mS) Discharge Cut-off Voltage $2.5 \pm 0.05 V$

500(0.2C, 25°C Cycle Life to 80% Health

Environmental Data

Allowed Max Charge Current

Output Voltage Range

45° C **Charging Temperature Range** Discharge Temperature Range 60° C 45° C

Storage Period 1 Month 45° C

Storage Period 6 Months $0 - 35^{\circ} C$

Battery Protection

Storage Period 1 Week

Over Charge $4.275 \pm 50 \text{mV}$ Over Discharge $2.5V \pm 50mV$

Over Current 3A to 5A


Short Circuit Yes

Mechanical Data


Dimension(L_{1*}W*T) 64 x 35 x 3.8 mm


Weight appr 14.2 g Battery Terminals
*WC=With Connector FL=Flying Leads

Battery Dimension Pictures



Item	Parameter (mm)
Т	3.8
W	35
M	20
L	62
L ₁	64
BL	64 ± 1
CL	100

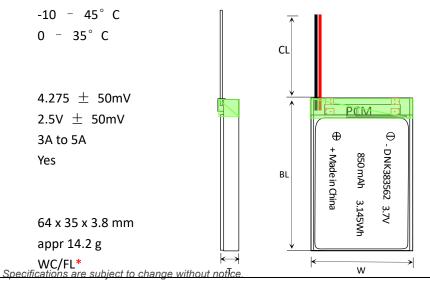

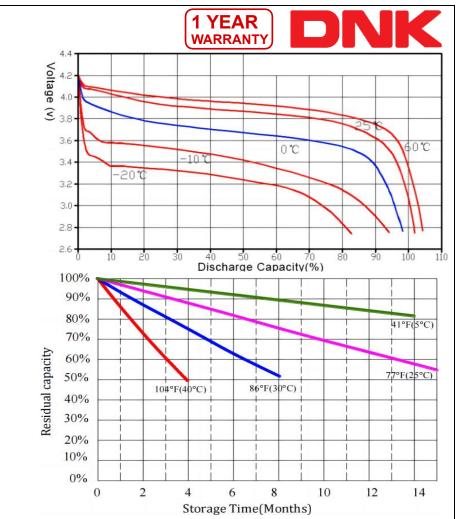

ANNOUNCEMENTS

- LiPo batteries have very specific charging requirements. Some chargers, such as those used for toys or cell phones, are made to charge a specific cell count and are not configurable for other cell counts. The LiPo charger used must be able to handle the cell count of the battery you are charging.
- Never charge a LiPo battery on a wooden or other combustible (carpeted) surface.

CONTACT INFO

Mail: sales@dnkpower.com

Mob:+86 189 4877 2006

Tel:+86 755 36827358

Hour of operation: 9:00am-6:00pm, Mon. to Fri.

Learn More on: https://www.dnkpower.com/