3.7V DNK605698 4400mAh LiPo Battery Pack with PCM. This datasheet describes the properties which is manufactured by DNK POWER Co. Ltd.- China.

Electrical Data

Part Number	LP 605698
Nominal Voltage	3.7V
Nominal Capacity	4400 mAh
Internal Impedance	＜60mΩ
Charge Voltage	4.2V
Recommended Charge Current	0.2C
Allowed Max Charge Current	0.5C
Output Voltage Range	4.2 - 2.5V
Recommend Discharge Current	0.2C
Max Continuous Discharge Current	1C
Pulse Discharge Current	3C(10mS)
Discharge Cut-off Voltage	2.5±0.05V
Cycle Life to 80% Health	500(0.2C, 25℃

Environmental Data

Charging Temperature Range	0 – 45° C
Discharge Temperature Range	-20 – 60° C
Storage Period 1 Week	-20 – 45° C
Storage Period 1 Month	-10 – 45° C
Storage Period 6 Months	0 – 35° C

Battery Protection

Over Charge	4.275 ± 50mV
Over Discharge	2.5V ± 50mV
Over Current	3A to 5A
Short Circuit	Yes

Mechanical Data

Dimension(L_1*W*T)	100 x 56 x 6.0 mm
Weight	appr 73.4 g
Battery Terminals	WC/FL*

*WC=With Connector FL=Flying Leads

Battery Dimension Pictures

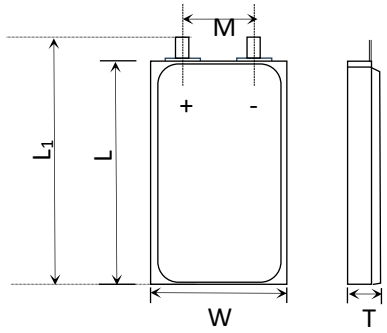

Item	Parameter (mm)
T	6.0
W	56
M	10
L	98
L_1	100
BL	100 ± 1
CL	100

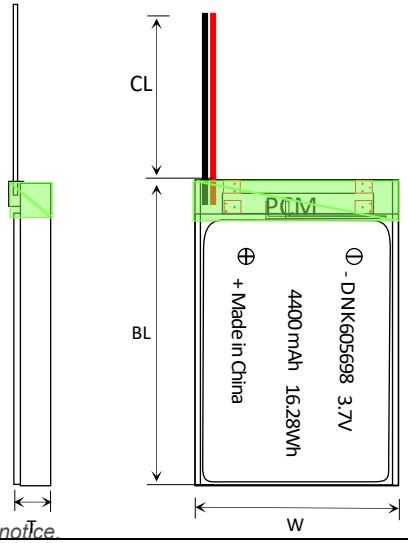

1 YEAR WARRANTY

DNK

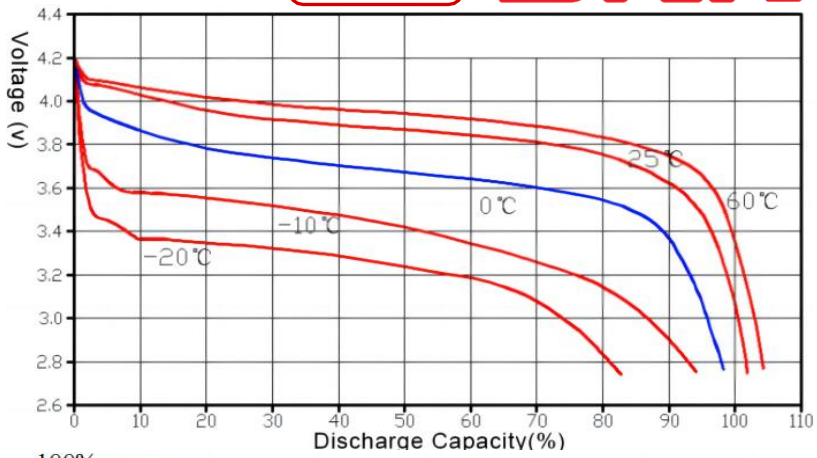

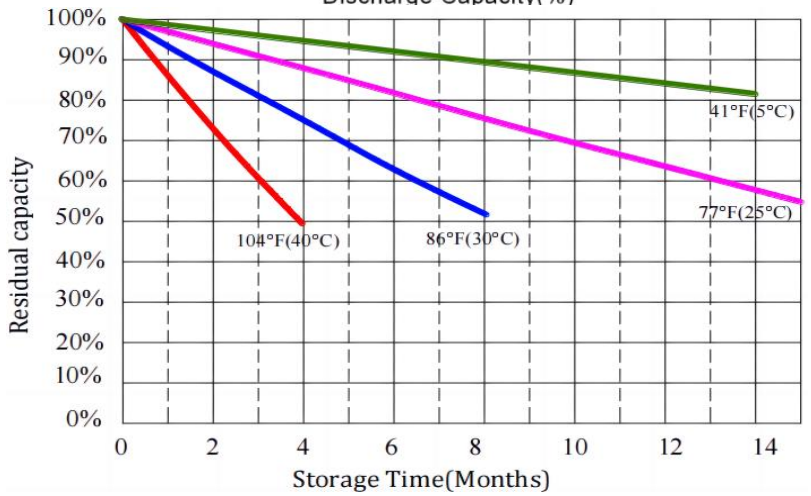

ANNOUNCEMENTS

● LiPo batteries must only be charged with a manufacturer recommended LiPo charger.

●LiPo batteries have very specific charging requirements. Some chargers, such as those used for toys or cell phones, are made to charge a specific cell count and are not configurable for other cell counts. The LiPo charger used must be able to handle the cell count of the battery you are charging.

CONTACT INFO

Mail: sales@dnkpower.com

Tel:+86 755 36827358 Hour of operation: 9:00am-6:00pm, Mon. to Fri.

Mob:+86 189 4877 2006 Learn More on: https://www.dnkpower.com/

Specifications are subject to change without notice.