

**1 YEAR WARRANTY**

**DNK**

3.7V DNK664940 1800mAh LiPo Battery Pack with PCM. This datasheet describes the properties which is manufactured by DNK POWER Co. Ltd.- China.

**Electrical Data**

Part Number	LP 664940
Nominal Voltage	3.7V
Nominal Capacity	1800 mAh
Internal Impedance	<60mΩ
Charge Voltage	4.2V
Recommended Charge Current	0.2C
Allowed Max Charge Current	0.5C
Output Voltage Range	4.2 - 2.5V
Recommend Discharge Current	0.2C
Max Continuous Discharge Current	1C
Pulse Discharge Current	3C(10mS)
Discharge Cut-off Voltage	2.5 ± 0.05V
Cycle Life to 80% Health	500(0.2C, 25°C)

**Environmental Data**

Charging Temperature Range	0 - 45° C
Discharge Temperature Range	-20 - 60° C
Storage Period 1 Week	-20 - 45° C
Storage Period 1 Month	-10 - 45° C
Storage Period 6 Months	0 - 35° C


**Battery Protection**

Over Charge	4.275 ± 50mV
Over Discharge	
Over Current	2.5V ± 50mV
Short Circuit	3A to 5A
	Yes




**Mechanical Data**

Dimension(L <sub>1</sub> *W*T)	42 x 49 x 6.6 mm
Weight	appr 30 g
Battery Terminals	WC/FL*

**Battery Dimension Pictures**

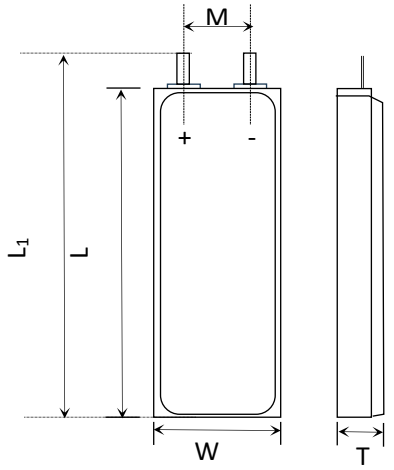

Item	Parameter (mm)
T	6.6
W	49
M	20
L	40
L <sub>1</sub>	42
BL	42 ± 1
CL	100

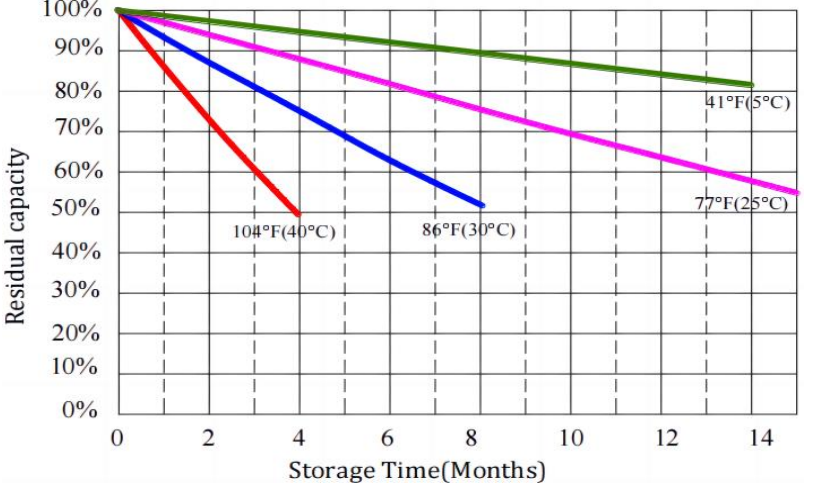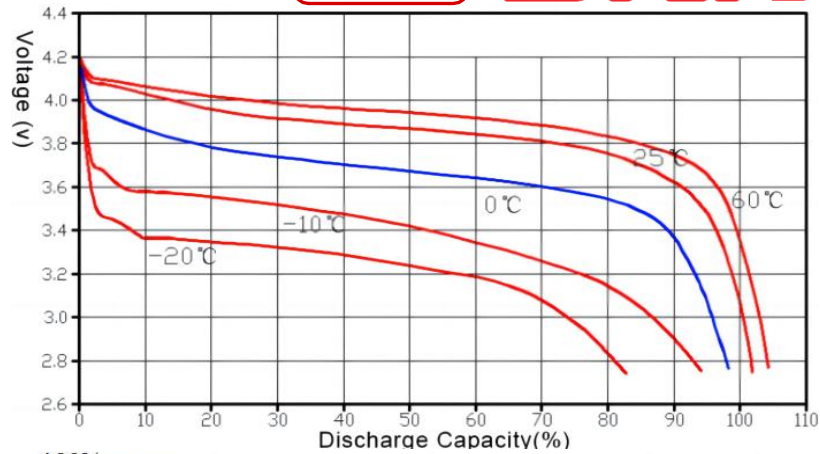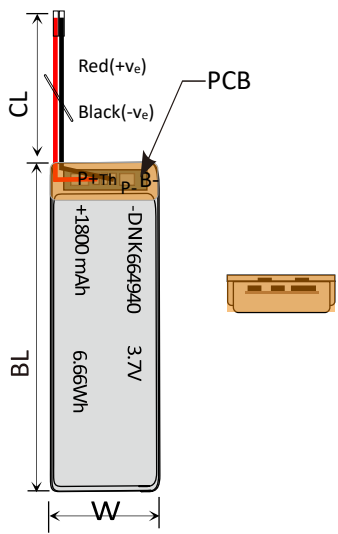

**ANNOUNCEMENTS**

- Never leave batteries inside a hot car or garage or any other place where temps may exceed 140°F / 60°C.
- Although environmentally friendly, lithium polymer cells must be FULLY discharged before disposal. Use a resistor setup (light bulbs, for example) to accomplish this, to avoid the possibility of a short-induced fire after disposal.

**CONTACT INFO**

Mail: sales@dnkpower.com  
 Tel:+86 755 36827358  
 Mob:+86 189 4877 2006  
 Hour of operation: 9:00am-6:00pm, Mon. to Fri.  
 Learn More on: <https://www.dnkpower.com/>

\*WC=With Connector FL=Flying Leads Specifications are subject to change without notice.