

1 YEAR WARRANTY


DNK

3.7V DNK953566 2700mAh LiPo Battery Pack with PCM. This datasheet describes the properties which is manufactured by DNK POWER Co. Ltd.- China.

Battery Dimension Pictures



Item	Parameter (mm)
T	9.5
W	34
M	20
L	66
L ₁	68
BL	68 ± 1
CL	100

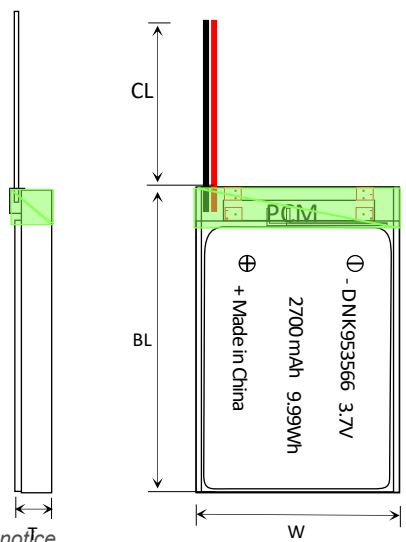

Electrical Data

Part Number	LP 953566
Nominal Voltage	3.7V
Nominal Capacity	2700 mAh
Internal Impedance	<60mΩ
Charge Voltage	4.2V
Recommended Charge Current	0.2C
Allowed Max Charge Current	0.5C
Output Voltage Range	4.2 - 2.5V
Recommend Discharge Current	0.2C
Max Continuous Discharge Current	1C
Pulse Discharge Current	3C(10mS)
Discharge Cut-off Voltage	2.5 ± 0.05V
Cycle Life to 80% Health	500(0.2C, 25°C)

Environmental Data

Charging Temperature Range	0 - 45° C
Discharge Temperature Range	-20 - 60° C
Storage Period 1 Week	-20 - 45° C
Storage Period 1 Month	-10 - 45° C
Storage Period 6 Months	0 - 35° C

Battery Protection

Over Charge	4.275 ± 50mV
Over Discharge	2.5V ± 50mV
Over Current	3A to 5A
Short Circuit	Yes

Mechanical Data

Dimension(L ₁ +W*T)	68 x 34 x 9.5 mm
Weight	appr 45 g
Battery Terminals	WC/FL*

*WC=With Connector FL=Flying Leads Specifications are subject to change without notice



ANNOUNCEMENTS

- Store the li-po battery in a cool, dry place. If a large amount of li-po battery is stored or shipped, the li-po battery must be discharged first.
- Do not solder the li-po battery directly. If the li-po battery is noisy, high temperature, liquid leakage and other anomalies, please stop using it immediately.
- Do not put li-po battery into fire or attempt to disassemble, otherwise may burn or produce harmful substances.

CONTACT INFO

Mail: sales@dnkpower.com
 Tel:+86 755 36827358
 Mob:+86 189 4877 2006
 Hour of operation: 9:00am-6:00pm, Mon. to Fri.
 Learn More on: <https://www.dnkpower.com/>